

SERVO PARALLEL

MAIN DATA


- Max. Shear opening - 280 mm
- Max stroke 82 mm (at min. cutting time)
- Cut angles $0^{\circ} \div 90^{\circ}$ LH and $0^{\circ} \div 30^{\circ}$ RH
- C.D.: SG - DG 3" - DG 4"3/8 - TG 3"
- Integrated or stand-alone system, even on conventional feeder
- Interface with any type of machine

BENEFIT


- Parallel shear motion
- Simultaneous cut for each gob
- Modular and independent gob guide system
- Easy maintenance
- Reduce inventory
- Reduced job change downtime
- Constant cutting time at all machine speeds
- Reduced set up times
- More constant gob weight at high speed
- Presetting cutting cams
- Improved shear blade life

FEATURES

- Outside shear arms bearings to improve the rigidity of the arms
- New modular gob guide for easy change
- Right shear arm with independent gob guides adjustment
- Left shear blades holder arm with adjusting system for blades tension
- Lateral support with magnetic lock for mechanism clamping in working position
- Safety shear arms opening with pneumatic cylinders
- Shears mechanism support with height adjustment and lateral centring system

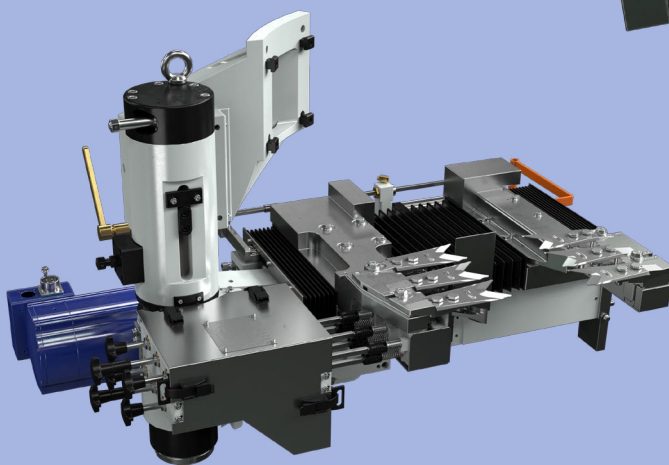

Servo Parallel without carter

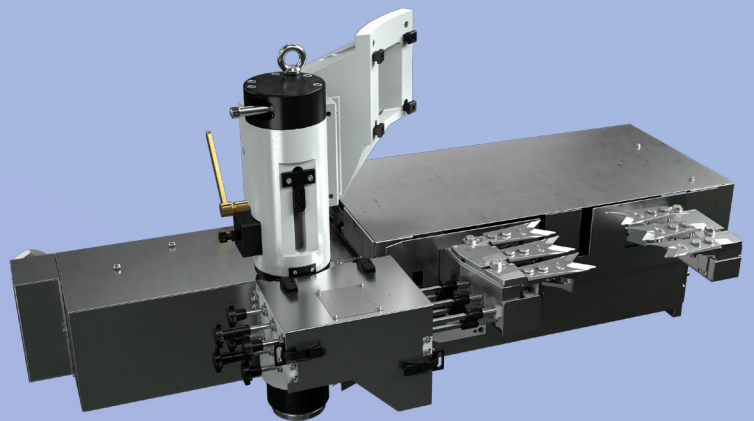

Servo Parallel with carter